

# 4 POSTS LIFT

ELECTRO HYDRAULIC


## [FP SERIES]

CAPACITY 3,500 / 4,000kg

Long selling model with a safe design





### Key Features



**SAFETY DEVICE**  
against chain breakage




**OIL FLOW CUT-OFF VALVE**  
against hydraulic breakage

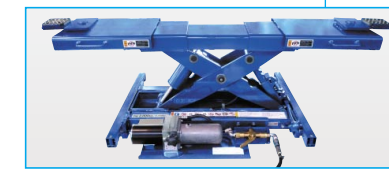


**JACKING BEAM** (OPTION)  
(Pneumatic-hydraulic)  
See page 30 for more detail



**SAFETY DEVICE**  
against wire breakage




**STANDARD** 70mm  
**OPTION** 115mm  
**SIDE SILL BLOCK** (4pcs/set)

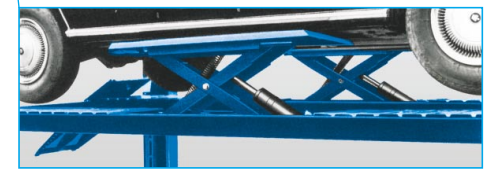


**UPPER LIFT FOR WHEEL-FREE**  
(FP3500X and FP4000X)

### Specifications


#### FP3500

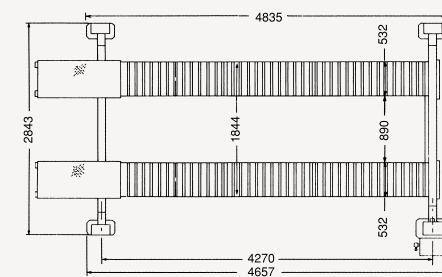




#### FP3500X

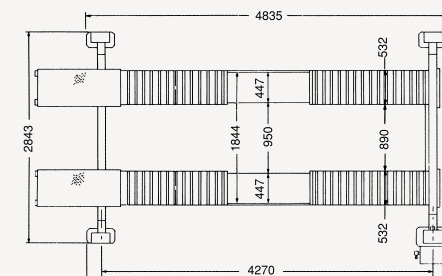

#### FP4000

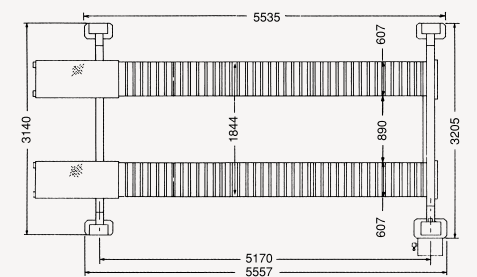


#### FP4000X

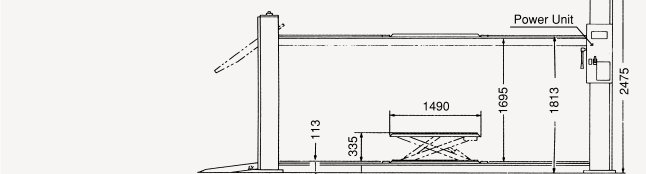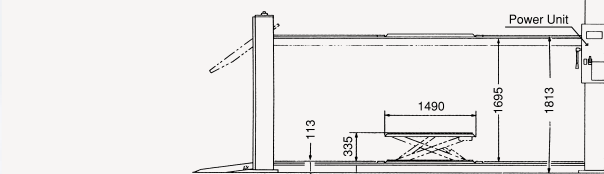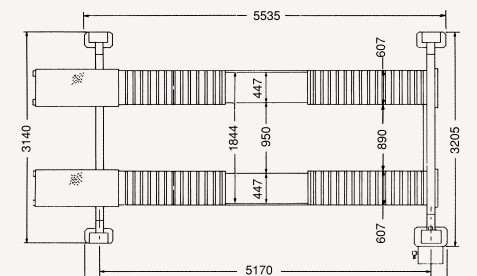

Model No.		FP3500	FP3500X	FP4000	FP4000X
Capacity	Lower Lift	3,500kg		4,000kg	
	Upper Lift	—	1,500kg x 2	—	1500kg x 2
Vertical Travel	1,695mm				
Control	Lever type				
Power	3 phase				
Motor	1.5kW		2.2kW		
Lifting Time (Approx)	Lower Lift	60Hz	50 sec.		
		50Hz	60 sec.		
	Upper Lift	60Hz	13 sec.		
		50Hz	16 sec.		
Oil Volume	8L (ISO VG32)				

### Option

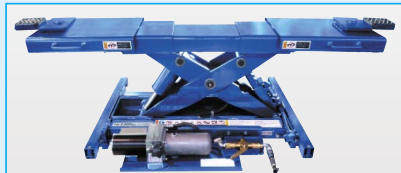

**JACKING BEAM**  
(Pneumatic-hydraulic)  
See page 30 for more detail