

[TORTOISE G]

CAPACITY 3,000kg

Above Ground Model

Pit Model

Key Features

SUPER LOW PROFILE



Minimum Height is only 105mm which makes drive on / off operation easy. Lift can be installed above floor or recessed into a shallow pit.

SLIDING SUPPORTER



1,507~2,101mm (SCL3000A)

1,532~2,162mm (SCL3000AP)

SMOOTH CONTROLLED LOWERING

The synchro cylinder system incorporates a "forced lowering" system that ensures smooth lowering even with no load.

RELIABLE SYNCHRONIZING SYSTEM


Bishamon's patented hydraulic synchro cylinder ensures reliable lift synchronization.

HYDRAULIC UNIT IS SEPARATED FROM THE LIFT



Specifications

SCL3000A

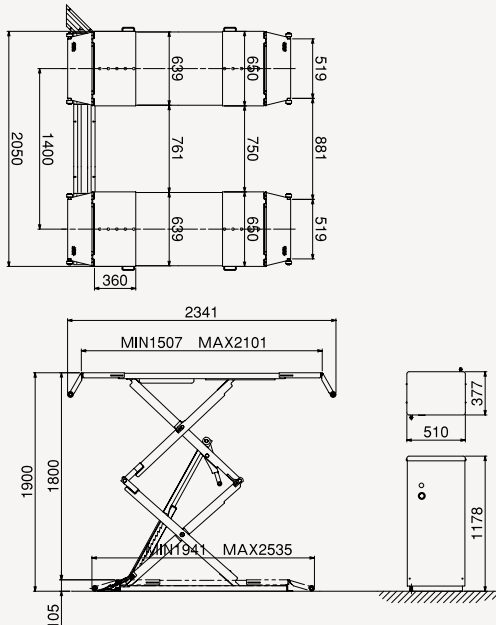

Model No.	SCL3000A	SCL3000AP
Installation	Above ground	Pit Installation
Hyd. Unit	Separated	
Capacity	3,000kg	
Vertical Travel	1,800mm	
Control	Cable remote control switch	
Power	3 phase	
Lifting Time (Approx)	60Hz	48 sec.
	50Hz	58 sec.
Lowering Time (Approx)	28 sec.	
Motor	1.5kW 4P 10 min. rating	
Oil Volume	15L (ISO VG32)	
Air Pressure	0.5~1.0MPa	